Product Data Sheet DIAION[™] HP20SS


DIAION[™] HP20SS is small particle grade based on DIAION[™] HP20. A controlled pore size distribution and large surface area offer excellent resolution and the capacity for a wide range of molecules, from small peptides and oligonucleotides up to large proteins. It offers nice balance of pressure flow characteristics and true chromatographic fractionation and has also been successfully applied in simulated moving bed applications for a variety of small bio molecules.

Grade Name		DIAION TM HP20S
Туре		Synthetic Adsorbents
Matrix		Styrene-DVB, Porous
Specification		
Water content	%	55 - 6
Particle Size Distribution on 150 μm	%	15 max
Particle Size Distribution 63 - 150 μm	%	70 mir
Particle Size Distribution thr. 63 μm	%	20 max
Properties		
Shipping Density	g/L	67
Particle Density	g/mL	1.0
Specific Surface Area	m²/g	56
Pore Volume	mL/g	1.
Pore Radius	Å	29
		12
Maximum Operating Temperature	°C	13 0 - 1
Maximum Operating Temperature Operating pH Range	°C	0 - 1
Maximum Operating Temperature Operating pH Range Minimum Bed Depth	°C mm	0 - 1 80
Maximum Operating Temperature Operating pH Range	°C mm BV/h	0 - 1 80 Loading 0.5 -
Maximum Operating Temperature Operating pH Range Minimum Bed Depth	°C mm BV/h BV/h	0 - 1 80 Loading 0.5 - 1 Displacement 0.5 - 1
Maximum Operating Temperature Operating pH Range Minimum Bed Depth	°C mm BV/h BV/h BV/h	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 -
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate	°C mm BV/h BV/h	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 -
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate Regenerant	°C mm BV/h BV/h BV/h BV/h	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 - Rinse 1 -
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate Regenerant	°C mm BV/h BV/h BV/h BV/h BV/h	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 - Rinse 1 -
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate Regenerant	°C mm BV/h BV/h BV/h BV/h nic solvents fe	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 - Rinse 1 - or hydrophobic compound ases for acidic compound
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate Regenerant Orga	°C mm BV/h BV/h BV/h BV/h nic solvents fe	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 - Rinse 1 - Dr hydrophobic compound ases for acidic compound Acids for basic compound
Operating pH Range Minimum Bed Depth Flow rate Regenerant Orga	°C mm BV/h BV/h BV/h BV/h nic solvents fo B	0 - 1 80 Loading 0.5 - 1
Maximum Operating Temperature Operating pH Range Minimum Bed Depth Flow rate Regenerant Orga	°C mm BV/h BV/h BV/h nic solvents fo B	0 - 1 80 Loading 0.5 - Displacement 0.5 - Regeneration 0.5 - Rinse 1 - Or hydrophobic compound ases for acidic compound Acids for basic compound or pH sensitive compound

Mitsubishi Chemical Corporation

Product Data Sheet DIAION[™] HP20SS

Pore size distribution

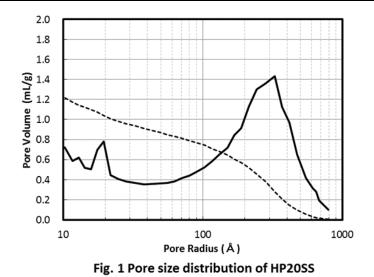


Swelling Ratio In Various Solvents

Methanol	1.21
Ethanol	1.21
2-Propanol	1.29
Acetone	1.30
Toluene	1.26
Acetonitrile	1.24
Water	1.00

Hydraulic Characteristics

The approximate pressure drop at various temperatures and flow rates for each meter of bed depth of $DIAION^{TM}$ HP20SS resin in normal down flow operation is shown in the graph below.

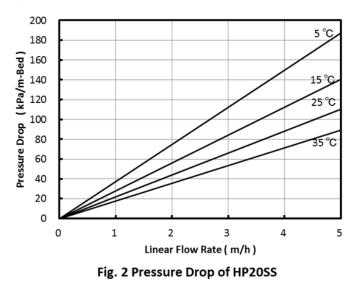

Mitsubishi Chemical Corporation

Product Data Sheet DIAION[™] HP20SS

Indicative Applications

- · Purification of small peptides, oligonucleotides and proteins
- Adsorption of vitamins, antibiotics, enzymes, steroids and other substance from fermentation solutions
- Decolorization of various sugar solutions
- Adsorption of fatty acids
- Removal of phenol
- Adsorption of various perfume
- · Decolorization and purification of various chemicals

Storage condition

Synthetic adsorbents are at high risk of mold growth. Accordingly, synthetic adsorbents should be stored properly. Properly stored synthetic adsorbent resins may be stored for up to one year after production before the onset of any mold growth is detected. Optimal storage is with a 20% alcohol solution such as ethanol or isopropanol. A 10% or higher concentration of salt solution, such as NaCl, is also recommended to preserve new or used resin for storage. In case salt cannot be used, a 0.01 to 0.02 N NaOH solution may be acceptable as mold cannot withstand survival at pH higher than 12. Storage at freezing temperatures should be avoided as it may cause breakage or crush certain resin particles.

Notice

DIAION[™] is a registered trademark of Mitsubishi Chemical Corporation. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical Corporation specifications agreed to pursuant to a signed writing during the warranty period, and except as required by law, MITSUBISHI CHEMICAL CORPORATION AND ITS AFFLIATES MAKE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

Mitsubishi Chemical Corporation